


DAYSTAR FILTERS

Standard Refractor Configuration

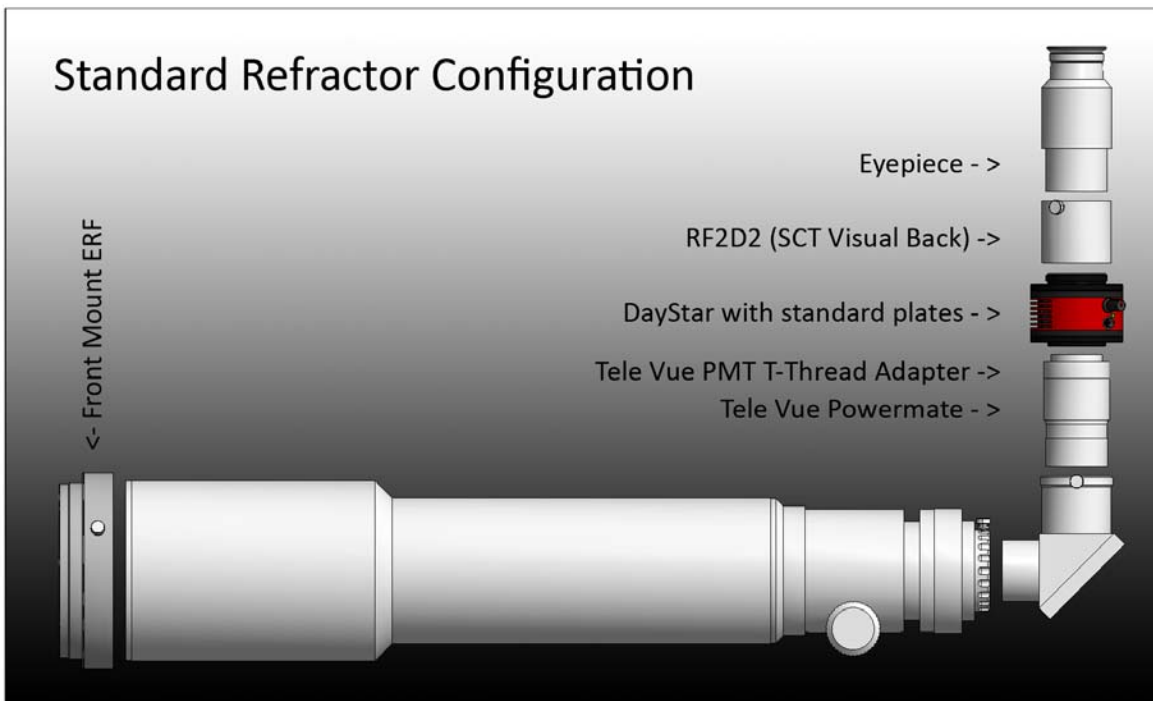

- Energy rejection pre-filter blocks UV light to protect telescope from overheating.
- Rear mounted requires ~ F/30 parallel light
- F/30 is reached with the appropriate barlow
- Tele Vue Powermate barlows offer true telecentric results. Other barlows will give a hot spot and vignetting.
- PMT adapters are suggested with Powermates
- DayStar comes with SCT male threaded back plate.
- RF2D2 visual back provides a drawtube
- We recommend Tele Vue Plossl eyepieces like the 55mm